


# Serie 50 50 Series



ASSA ABLOY, the global leader  
in door opening solutions

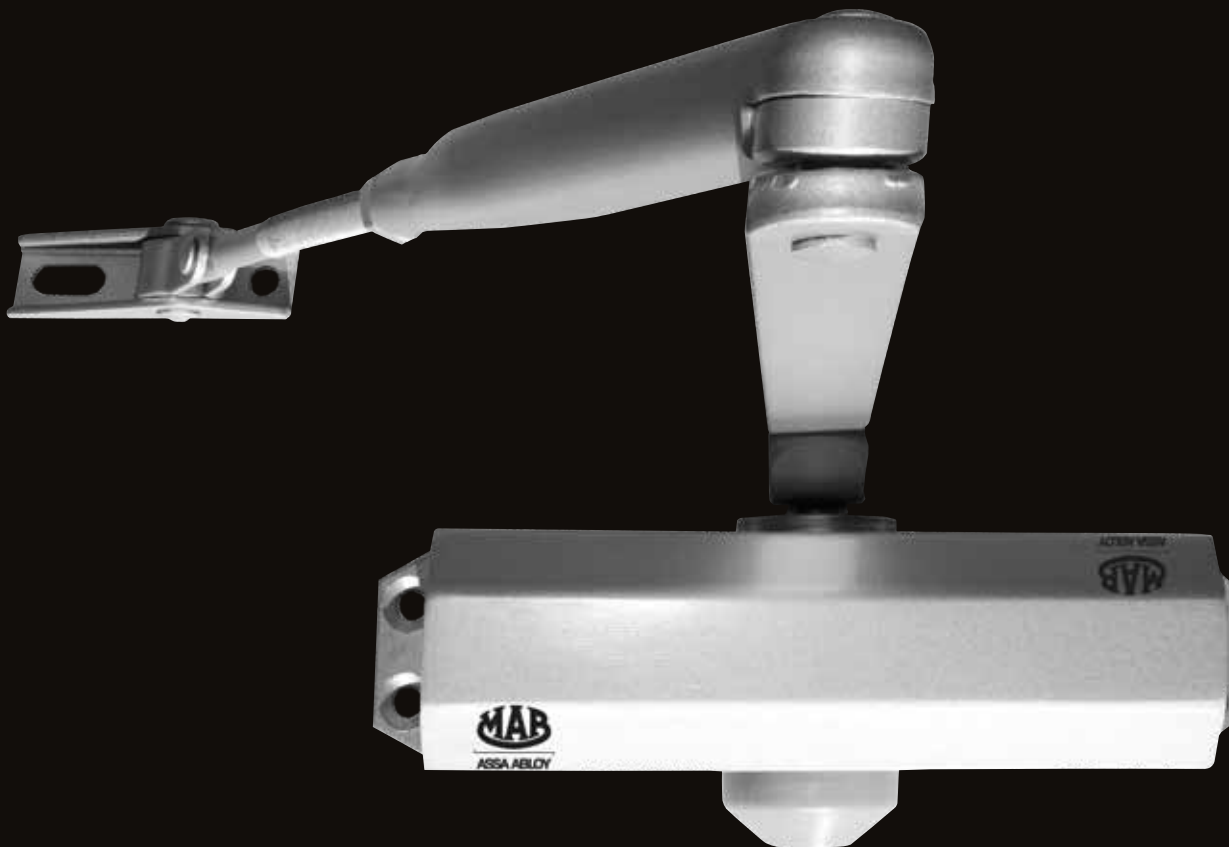

# Chiudiporta aerodinamico compatto e versatile

## *Surface mounted door closer* *compact and versatile*

### Caratteristiche tecniche:

- Corpo in alluminio di lega speciale.
- Forza di chiusura variabile 2-3-4 per porte da 850mm fino a 1100mm
- Velocità di chiusura regolabile con valvola termostatica non critica.
- Scatto finale da circa 10°. L'angolo di scatto è facilmente modulabile da braccio tenditore fino alla sua eliminazione completa (chiusura dolce).  
La possibilità di scatto potente anche da angolo ridotto a pochi gradi, garantisce la chiusura anche in caso di serrature con scrochi particolarmente duri.
- Finiture di serie: argento, nero opaco, bianco RAL 9016.

### Features:

- *Body in special alloy aluminium.*
- *Selectable closing force sizes 2-3-4 for door 850-1100mm wide.*
- *Closing speed adjustable by non critical thermostatic valve.*
- *Final latch from approx. 10°. The latch angle is easily reduced by turning the forearm, up to its elimination (soft closing).*  
*The possibility to ensure an efficient closure also from an arc of just few degrees, guarantees reduced noise action in case of hard-to-close latches*
- *Standard finishes: silver, matt black, white RAL 9016.*







ASSA ABLOY


## Regolazione della velocità di chiusura

### Closing speed adjustment

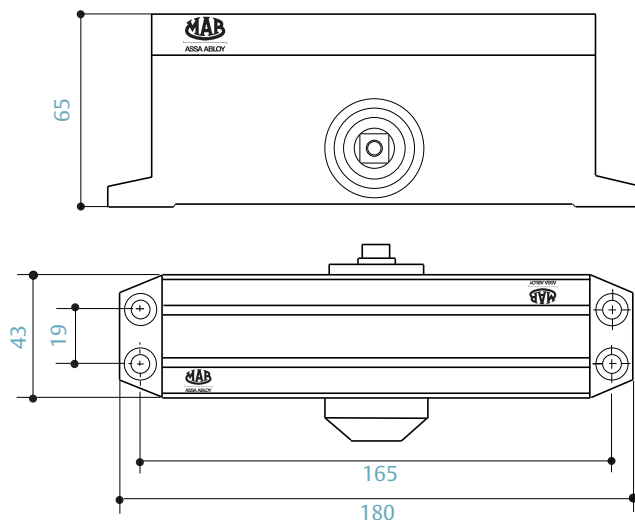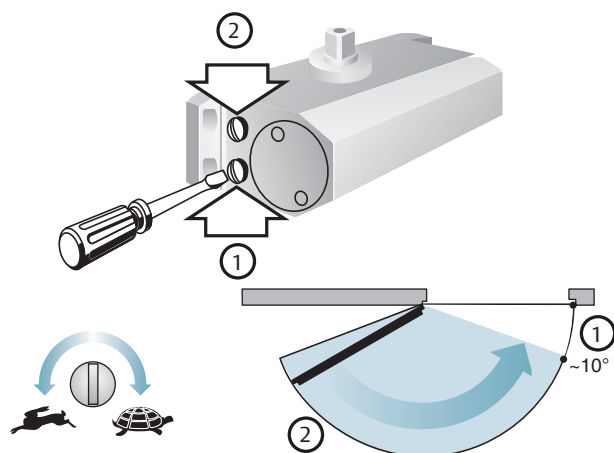

## Regolazione dell'angolo di scatto finale ( $\sim 10^\circ - 0^\circ$ )

### Adjustment of final latch angle ( $\sim 10^\circ - 0^\circ$ )

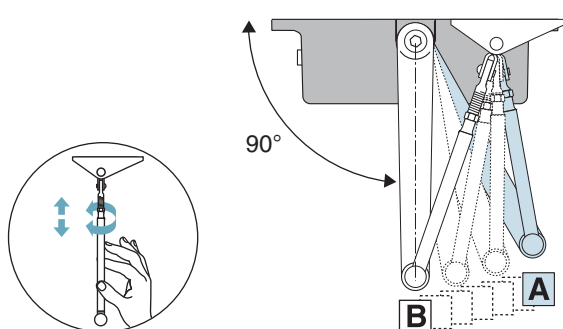


**B** Con scatto finale  
With final latch

**A** Senza scatto finale  
Without final latch


Selezione dell'angolo di scatto desiderato

Setting of desired angle of final latch

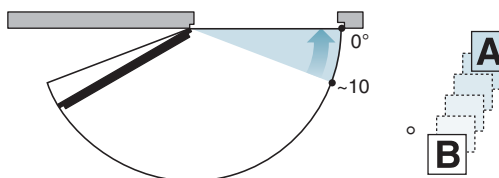


## Montaggio normale lato cerniere

### Standard mounting pull side

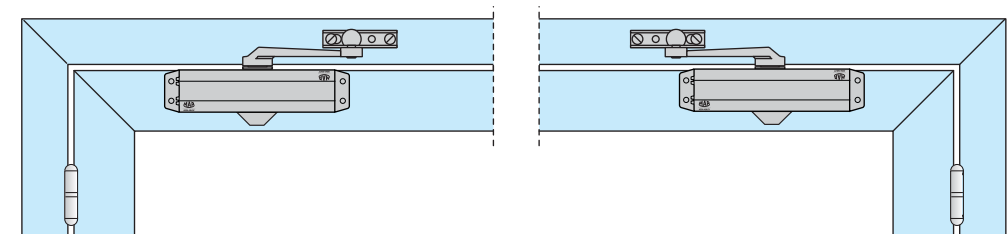

## Montaggio rovesciato lato opposto cerniere

### Reversed Mounting Push Side

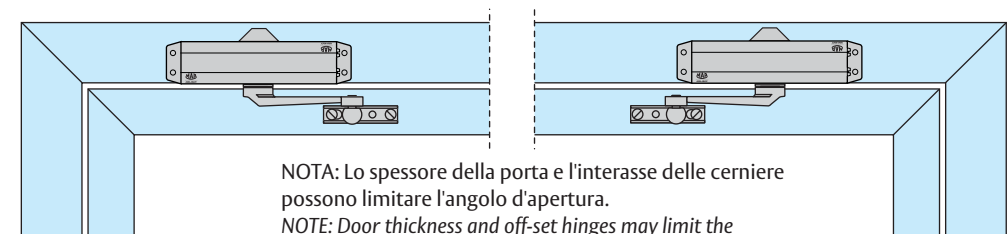

NOTA: Lo spessore della porta e l'interasse delle cerniere possono limitare l'angolo d'apertura.  
NOTE: Door thickness and off-set hinges may limit the opening angle.



ASSA ABLOY Italia S.p.A.  
Sede legale/Legal address:  
Via Bovaresa, 13 - 40017 San Giovanni in Persiceto (BO) Italy  
Tel. +39 051 6812411 - Fax +39 051 827486

[info@assaabloy.it](mailto:info@assaabloy.it) - [www.assaabloy.it](http://www.assaabloy.it)

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.

[www.assaabloy.com](http://www.assaabloy.com)

**MAB**  
ASSA ABLOY